



## Yuasa Fiche de données techniques

### Yuasa YBX3054 - Batteries SMF YBX3000

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

#### Performance

Tension	12V
Capacité (20 heures)	36Ah
Performances en démarrage à froid (EN1)	330A

#### Dimensions

Longueur	187mm
Largeur	127mm
Hauteur	227mm



#### Poids & Mesures

Poids moyen avec acide	9.3kg
------------------------	-------

#### Caractéristiques du bac

Type de bac	JIS B19
Système de fixation	N
Indicateur de l'état de charge	✓
Poignées	✓
Sortie(s) d'aération	✓
Type de couvercle	Double capot (anti-écoulement et sans entretien)


#### Technologie

Dispositif stop-flamme	✓
Technologie	Ca/Ca
Séparateur	PE
Test de retournement VDA	✓
Taux de charge recommandé	2A
Performance Marking	W3-C2-V2-E1


#### Type de bornes

##### T1/T3


Standard DIN Post



Remove T1 adapter for T3



#### Schéma de montage des éléments Système de fixation de la batterie

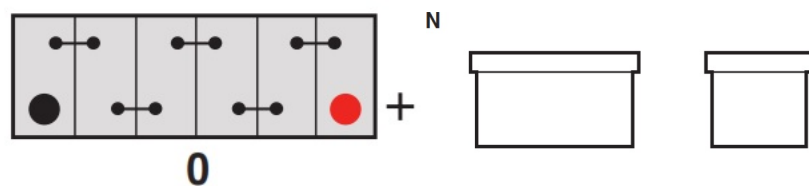

Date de publication: 24/09/2021 - E&OE



## Yuasa Technical Data Sheet

### Yuasa YBX3054 - YBX3000 SMF Batteries

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

#### Performance

Voltage	12V
Capacity (20-hour)	36Ah
Cold Cranking Amps (EN1)	330A

#### Dimensions

Length	187mm
Width	127mm
Height	227mm



#### Weights & Measures

Mean Weight with Acid	9.3kg
-----------------------	-------

#### Container Features

Case Type	JIS B19
Hold Down	N
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


#### Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca
VDA Roll Over Test	PE
Recommended Charge Rate	✓
Performance Marking	2A
	W3-C2-V2-E1


#### Terminal Type

##### T1/T3


Standard DIN Post



Remove T1 adapter for T3



#### Cell Assembly Layout

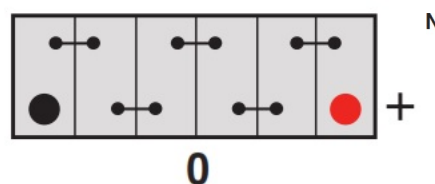

#### Battery Hold-down



Data Sheet generated on 24/09/2021 – E&OE